

High Wall Heater WHF-HM Series



Model Code:

WHF-HM 12 10 -A
A B C D

A: Wall Heater
B: 12 - 120V 24 - 240V
20 - 208V
C: Watts (500 to 2000)
D: Color



- High Mount Design
- Squirrel Cage Blower
- Whisper Quiet
- Ni-chrome Open-Coil Element
- Patented Smart Limit Protection*
- 20 gauge powder-coated grill
- Standard color: bright white
- C-Frame Motor
- 20 gauge electrogalvanized steel recess can with
- Wall can with QuickSet™ stud alignment tabs
- 120, 208, or 240 volts
- Dual Wattage

The WHF-HM Wall Heater

The WHF-HM High Mount heater is designed for applications to be mounted high on the wall. It is commonly used where wall space is limited. The high wall mounting allows you to use absolutely any wall in a room without affecting the furniture or decor placement. The WHF-HM provides extreme value by combining an open coil Ni-chrome wire element and squirrel cage blower. For maximum comfort and efficiency, an electronic wall thermostat is recommended. The wall can shall be 20 gauge electro-galvanized steel and contain knockouts through which power leads are brought. The wall can shall be able to mount directly to wall studs in new or existing construction. The wall can shall be provided with QuickSet™ stud alignment tabs, used for maintaining proper depth during new installation. The wall can shall be supplied with a factory installed ground wire. Minimum Clearance: 6" to a side wall, 4" from floor, 12" from ceiling.

Ordering Information

*Add suffix -A for optional almond color

	MODEL	UPC	VOLTS	WATTS	AMPS	SHIP WEIGHT
120V	WHF1210-HM	20722	120	500 • 1000	4.2-8.4	8 lbs
	WHF1212-HM	20723	120	600 • 1200	5-10	8 lbs
	WHF1215-HM	20724	120	750 • 1500	6.25-12.5	8 lbs
208V	WHF2010-HM	20725	208	500 • 1000	2.4-4.8	8 lbs
	WHF2015-HM	20726	208	750 • 1500	3.6-7.2	8 lbs
	WHF2020-HM	20727	208	1000 • 2000	4.8-9.6	8 lbs
	WHF2410-HM	20728	240	500 • 1000	2.1-4.2	8 lbs
240V	WHF2412-HM	20729	240	600 • 1200	2.5-5	8 lbs
	WHF2415-HM	20730	240	750 • 1500	3.1-6.2	8 lbs
	WHF2420-HM	20731	240	1000 • 2000	4.2-8.4	8 lbs

Engineering Specifications

Contractor shall supply and install WHF-HM Series in-wall mounted forced-air electric heaters manufactured by King Electrical Mfg. Company. Heaters shall be of the wattage and voltage as indicated on the plans.

Ratings: Heaters shall be available in wattages of 500 to 2,000 at 120, 208, or 240 Volts

Blower and Motor: A whisper quiet tangential blower, delivering 75 CFM, shall be driven by a shaded pole, permanently lubricated, C-frame type motor with impedance protection and sealed bearings. Motors shall be the same voltage as the heater. The motor and all wiring shall be totally isolated from the heating chamber for protection from heated air.

Thermal Overload: Heaters shall be equipped with King's patented thermal overload Smart Limit Protection®, which disconnects elements and motor in the event normal operating temperatures are exceeded. If thermal overload trips due to abnormal operating temperatures, thermal overload shall remain open until manually reset by turning the heater off for 15 minutes. Automatic reset of thermal overloads, which allow the element to continue to cycle under abnormal conditions, will not be accepted.

Elements: Element assemblies shall be constructed of coiled nickel chromium alloy, corrosion resistant wire strung through a minimum of four rows of mica insulator. Element assemblies shall have factory provided connection to allow field modification to 50% wattage at time of installation.


Wall Can: The wall can shall be 20 gauge electrogalvanized steel and shall contain knockouts. The wall can shall be provided with a depth gauge, extending the full length of the wall can. The wall can shall be supplied with a factory installed groundwire. Minimum clearance 4" from floors, 6" to sidewalls, and 12" to the ceiling.

Grill: The grill shall be a louvered, one-piece design with rounded edges on all four sides, with rounded corners to prevent snags from contact with other materials. The grill shall be epoxy powder-coated in the color specified by the manufacturer

Approvals: cULus (E41422)

High Wall Heater WHF-HM Series

Dimensional Data

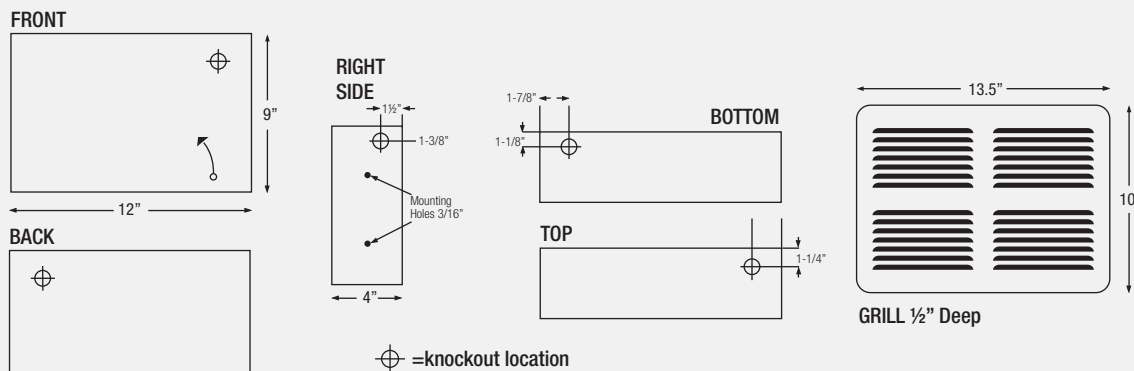

Options

ADD SUFFIX	DESCRIPTION	WEIGHT lbs
-A	Almond Color	8.0

Accessories

MODEL	UPC	DESCRIPTION	WEIGHT lbs
UIC	12640	Recess Wall Can	3.5
WHSC	19204	Surface Can - White 13.5" H x 10.125" W x 4" D	4.0
WHSC-ALMOND	19205	Surface Can - Almond 13.5" H x 10.125" W x 4" D	4.0
TKIT-1BW	20654	Built-in Single Pole Single Throw Thermostat Kit, Bright White	0.5
TKIT-2BW	20655	Built-in Double Pole Single Throw Thermostat Kit, Bright White	0.5
TKIT-1	11058	Built-in Single Pole Single Throw Thermostat Kit, Almond	0.5
TKIT-2	11059	Built-in Double Pole Single Throw Thermostat Kit, Almond	0.5

WHSC



Exploded View

